

KI14



Features

- The built-in damping spring has very good compensation for different heights when conveying workpieces.
- Large range of connection threads and lifting heights enables use for a wide variety of applications and suction pads.
- Spring damping and soft contact with sensitive workpieces.
- Abrasion resistant guide rod, longer life.


Specifications

KI 14 10 - □ - A18

① ② ③ ④ ⑤


①Series	②Suction Cup Connection	③Lifting Heights	④Specifications Way	⑤Guide Bush Male Thread
KI-Internal spring	14-G1/4	10-10mm stroke 20-20mm stroke 30-30mm stroke 50-50mm stroke	Blank-standard V-Female thread F-Non rotary	A18-M18X1 A20-M20X1.5

Main Dimension

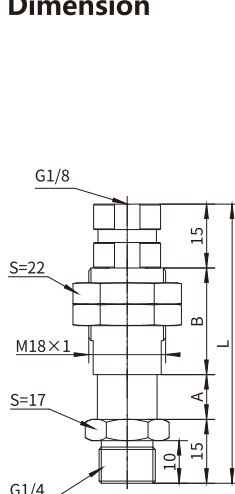


KI14 10-A18

①

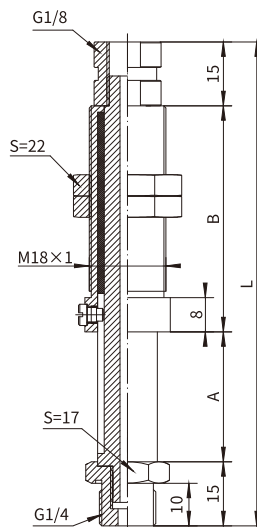

KI14 10-F-A18

①

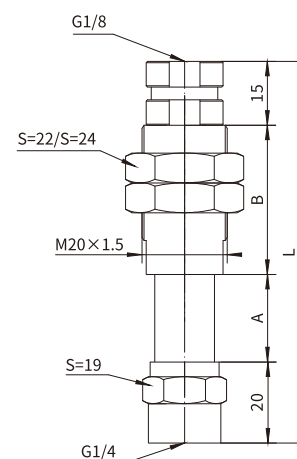

KI14 10-V-A18

①

②

①Lifting Heights	A	B	L
10	10.5	25	65.5
20	20.5	35	85.5
30	30.5	45	105.5
50	50.5	75	155.5

①Lifting Heights	A	B	L
10	10.5	25	73.5
20	20.5	35	93.5
30	30.5	45	113.5
50	50.5	75	163.5

①Lifting Heights	②Guide Bush Size	A	B	L
10	A18/20	10.5	25	73.5
20	A18/20	20.5	35	93.5
30	A18/20	30.5	45	113.5
50	A18/20	50.5	75	163.5