

KE14



Features

- The external damping spring has very good compensation for different heights when conveying workpieces.
- Large range of connection threads and lifting heights enables use for a wide variety of applications and suction pads
- Spring damping and soft contact with sensitive workpieces.
- Abrasion resistant guide rod, longer life.
- Optional anti-rotation function.


Specifications

KE 14 10 - □ - A18

① ② ③ ④ ⑤


① Series	② Suction Cup Connection	③ Lifting Heights	④ Specifications Way	⑤ Guide Bush Male Thread
KE-External damping spring	14-G1/4	10-10mm stroke 20-20mm stroke 25-25mm stroke 30-30mm stroke 50-50mm stroke 70-70mm stroke 75-75mm stroke	Blank-standard V-Female thread F-Non rotary	A18-M18X1 A20-M20X1.5

Main Dimension

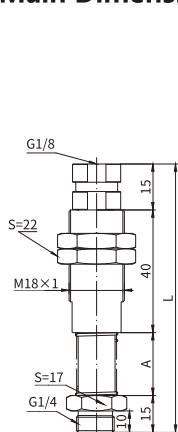

KE14 10-A18


①

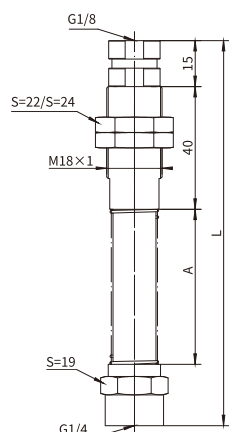

KE14 10-V-A18


①

②

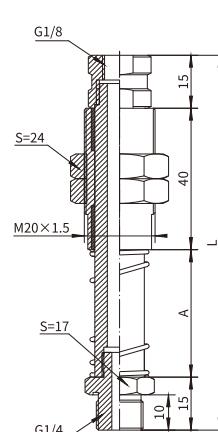

KE14 10-A20

①

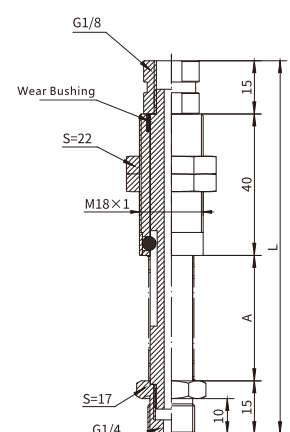

KE14 10-F-A18

①

① Lifting Heights	A	L
10	20.5	90.5
20	35.5	105.5
30	50.5	120.5
50	70.5	140.5

① Lifting Heights	② Guide Bush Size	A	L
10	A18/20	20.5	90.5
20	A18/20	35.5	105.5
30	A18/20	50.5	120.5
50	A18/20	70.5	140.5

① Lifting Heights	A	L
10	20.5	90.5
20	35.5	105.5
30	50.5	120.5
50	70.5	140.5
70	90.5	160.5

① Lifting Heights	A	L
10	20.5	90.5
20	35.5	105.5
30	50.5	120.5
50	70.5	140.5